



Trusted for Generations



Corrosion Prevention Lubricants

www.vickers-oil.com

Corrosion Protection & Long-Term Storage

When to use Corrosion Prevention Lubricants:

- Before storage of components and equipment that have bare metal surfaces and are defined as critical spares.
- Before further assembly or processing of finished metallic parts (engines, gearboxes, bearings, and other closed systems), example during shipping or whilst in use.
- When parts need to be protected after machining.
- When equipment may come in contact with other metals, paint, plastics, or rubber seals as part of an assembly.
- When parts need to be dewatered or dried to remove the water miscible coolant.

Why use Corrosion Prevention Lubricants:

Using a corrosion prevention lubricant can provide:

- Longer relubrication intervals.
- Reduced maintenance costs due to minimised wear.
- Effective protection against different corrosive mediums.
- Less damage during assembly and disassembly due to easier handling.

Where to use Corrosion Prevention Lubricants

The different uses and applications where temporary protection can be achieved by using the VICKERLUBE performance products include, but is not limited to, the following:

- Steel and coated steel strip.
- Steel profiles, sections, and tubes.
- Aluminium or other alloy strip and sections.
- Machined / Machinery parts and components either as finished items or for later assembly.
- Tools and machine tools used whilst manufacturing (including food processing), storage and supply.
- Fasteners such as screws, rivets, bolts, etc.
- Automotive components and sub-components.
- Electrical parts and assemblies.
- Agricultural, Construction and off-highway equipment.
- Metal tanks, valves, and lines.
- Vehicles, machinery, or equipment protection during shipment.
- Assemblies of equipment, moth-balled for long or short periods.
- High-cost repairable spares such as gearboxes, final drives and fuel tanks.

VICKERLUBE Industrial Lubricants for:

Automotive maintenance, Agricultural machinery, Boating & water sports, Engineering & industry, Mining & quarries, Critical spares, Utilities maintenance, Engineering Workshops
Printing equipment & machinery, Snow moving equipment





VICKERLUBE CPVI




Corrosion Preventing Vapour Inhibitor

- Rust preventive oil that provides superior rust and corrosion prevention in engines, gear boxes and other closed systems that will be placed into storage for extended periods of time.
- Fills any closed spaces with vapours to prevent rust and corrosion of surfaces not contacted by the oil.
- Cost Effective.
- Protects parts for up to one year*

* The length of time the protection continues depends upon how well sealed the closed system is and how much temperature- induced "breathing" of the system occurs.

Applications

For use to prevent rust and corrosion in high cost repairable spares such as gearboxes, engines, final drives, fuel tanks and other closed systems that require protection to prevent deterioration by corrosion during long term storage.



Treated with CPVI



Untreated

Typical characteristics and properties

VICKERLUBE CPVI	RESULT
Appearance	Light amber
Viscosity @ 20°C (cSt)	4
Flash Point	100°C
Shelf Life	2 years in original sealed containers whilst stored out of direct sunlight

VICKERLUBE BIO CPF



Biodegradable, High-performance multipurpose Corrosion Prevention Fluid

- Made from bio-based, sustainable ingredients.
- Creates a thin, colourless soft coating.
- Designed to penetrate, lubricate, displace moisture.
- Designed to clean and protect metal parts against corrosion.
- Quickly loosens and releases metal parts and mechanical equipment that are stuck, seized, or rusted together.

Applications

Corrosion Protection for Short-Term Storage of metal surfaces.

For use on pins, bushes, screws, valves, chains, bearings, couplings, levers, locks, hinges, cables, pulleys, winches, pedal crank arms, derailleur assemblies, gear mechanisms, and many more.

Typical characteristics and properties

VICKERLUBE BIO CPF	RESULT
Appearance	Green solution
Viscosity @ 25°C (cSt)	11.2
Water Solubility (g/l)	<1
Flash Point	176°C
Dry Film Thickness (µm)	<1
Coverage (m2/l)	330
Specific Gravity (g/cm3)	0.89
Shelf Life	3 years in original sealed containers whilst stored out of direct sunlight

VICKERLUBE SOFT COAT CPF



Clear Film, Soft, Waxy Corrosion Prevention Fluid

- Excellent long-term corrosion protection for metal surfaces.
- Leaves a soft waxy protective coating after drying.
- Non-flammable, VOC-free product, deposited with a non-aromatic solvent.
- Does not contain heavy metals.
- Does not crack, peel, or chip.
- Excellent water displacement properties.

Applications

Corrosion Protection for Long-Term Storage of metal surfaces.

For use on pins, bushes, screws, valves, chains, bearings, couplings, levers, locks, hinges, cables, pulleys, winches, pedal crank arms, derailleur assemblies, gear mechanisms, and many more.

Typical characteristics and properties

VICKERLUBE SOFT COAT CPF	RESULT
Appearance	Brown solution, which dries to leave a clear film
Protection Level	Long term*
Drying Time (hours)	24*
Film Type	Soft, waxy
Water Displacing	Yes
Flash Point (°C)	> 100
Film Thickness (μ)	< 15
Coverage (m²/l)	> 22
Density (g/cm³)	0.9
Shelf Life	3 years in original sealed containers whilst stored out of direct sunlight

VICKERLUBE Corrosion Prevention Range


Choosing the correct product



REQUIREMENT	VICKERLUBE CPVI	VICKERLUBE SOFT COAT CPF	VICKERLUBE BIO CPF
Internal protection of components including engines, gear boxes and other closed systems for periods up to one year or more.	✓		
Corrosion protection for long term storage of metal parts, e.g. uninstalled bearings, hydraulic pumps, close tolerance equipment, etc.		✓	
Corrosion protection for short term storage of metal parts, e.g. pins, bushes, screws, valves, chains, bearings, couplings, levers, locks, hinges, cables, pulleys, winches, pedal crank arms, derailleur assemblies, gear mechanisms, and many more.			✓
Corrosion protection for short term storage with reduced environmental impact			✓
PACK SIZE & PRODUCT CODE	VICKERLUBE CPVI	VICKERLUBE SOFT COAT CPF	VICKERLUBE BIO CPF
500 ml trigger pack		✓ 35450-500	✓ 35283-500
5 litre pail		✓ 35450-005	✓ 35283-005
500 ml tin	✓ 35278-500		



Trusted for Generations

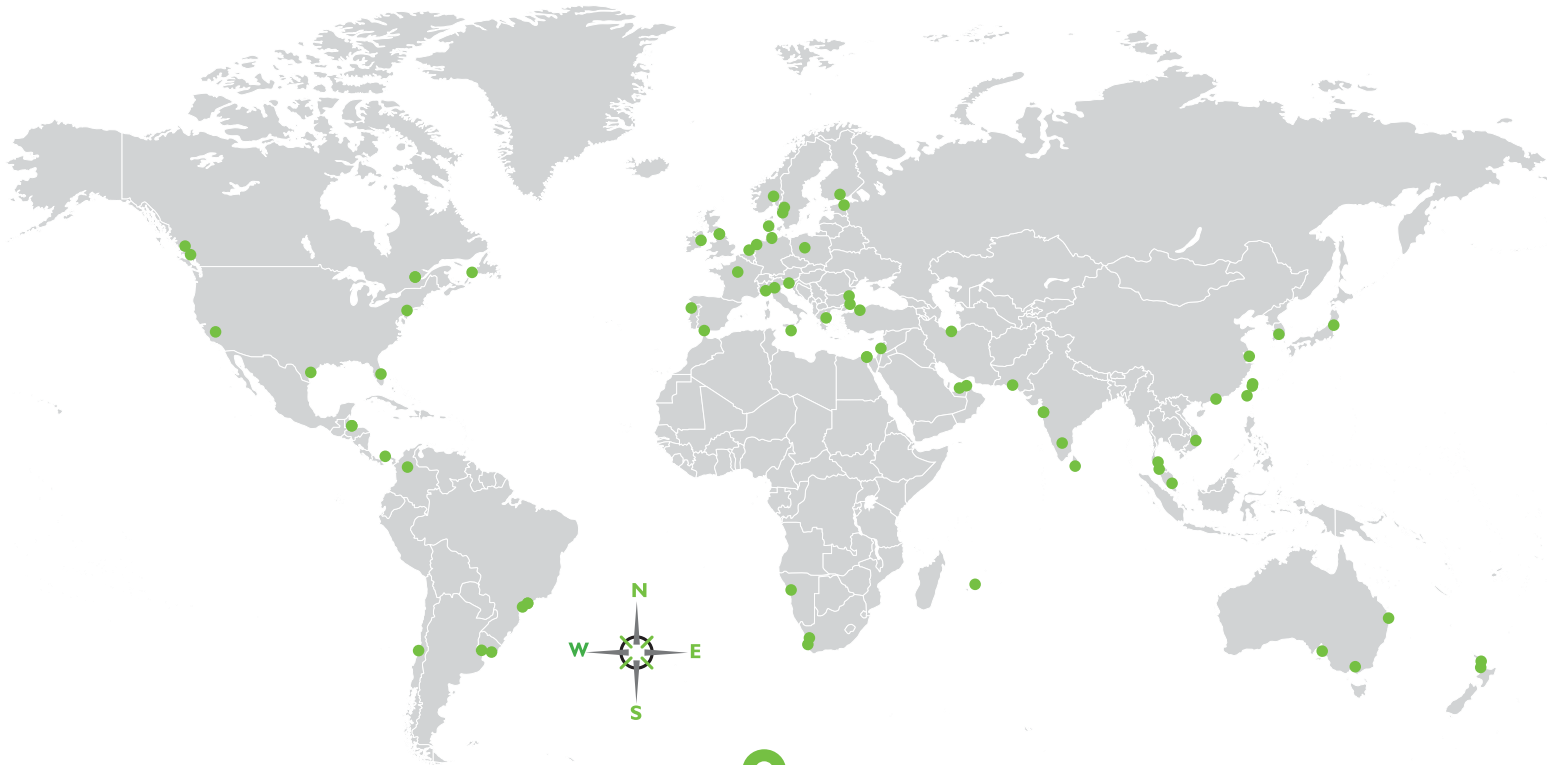

An **award-winning range** of EALs (Environmentally Acceptable Lubricants)



Regional stock points in over 40 locations



Ability and infrastructure to **respond quickly** to urgent requirements

Service & Support

30% of our workforce are employed in the technical team, focusing on Quality Control, R&D, OEM liaison and Technical Service allowing us to provide one-on-one dedicated customer support by our team of highly qualified experts.



Field Support



Lubrication Surveys and Recommendations



Equipment Reports and Analysis



Lubricant Analysis



Training

BENJN R. VICKERS & SONS LTD.

Registered Office
6 Clarence Road, Leeds,
LS10 1ND, United Kingdom

Registered in England
Company No. 00130013

Tel: +44 (0)113 386 7654
Email: inbox@vickers-oil.com
Web: www.vickers-oil.com

Follow us on



Certified to the ISO 9001
Quality Standard and the
ISO 14001 Environmental
Management Standard



FM 01851 EMS 40717